

FAAC A1400 Slide Door Checklist



Customer _____

Quote Name/Site: _____

Quote Number: _____


Date: _____

Quantity: _____

Passage Opening, mm (Vp): _____

Overall length = $2 \times Vp + 120\text{mm}$ (including end caps)


(Non Standard Head Section length, mm: _____)

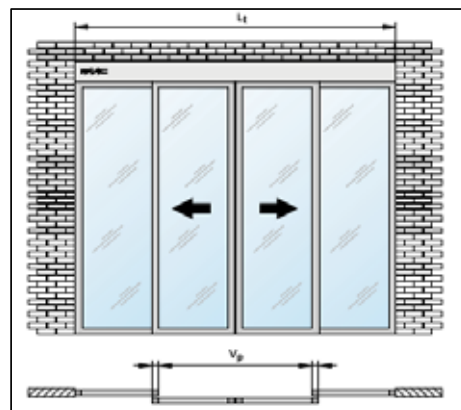

Door Configuration

- ☐ Single - left
- ☐ Single - right
- ☐ Dual
- ☐ Telescopic - left
- ☐ Telescopic - right
- ☐ Telescopic - Biparting

- ☐ Self Supporting
- ☐ Double motor

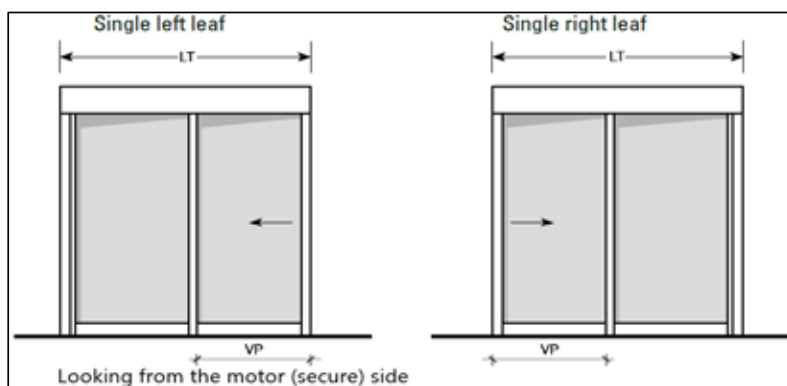

Pelmet

- ☐ 100mm Pelmet height
- ☐ 140mm Pelmet height
- ☐ Powdercoated
- Colour: _____

Leaf Type

- ☐ Aluminium Frame Thickness (mm): _____
- ☐ Glass Thickness (mm): _____

Weight (kg, per leaf): _____

Max: 200kg (single), 2 x 120kg (dual)

Opening/Safety Sensor (Qty)

- ☐ Sensor, IXIO DT1 Radar + Infrared Safety
- ☐ Sensor, Eagle 5 Black Motion Sensor
- ☐ Other: _____

Accessories

- ☐ Floor Guide Kit framed door
- ☐ Lower Guide Profile 3m
- ☐ Lower Guide Profile Brush 3m
- ☐ Frameless door guide, 10mm
- ☐ Frameless door guide, 12mm

Battery/Function Selectors/Switches/Locks

- ☐ Battery backup
- ☐ SDK EVO Full Programmer
- ☐ LK EVO Keeper Light, Function Selector
- ☐ KS EVO Key function selector
- ☐ XM Motor Lock, Fail Safe
- ☐ XB Motor Lock, Fail Secure with release switch
- ☐ Magic Switch, contactless
- ☐ Magic Switch in enclosure, contactless
- ☐ Magic Switch in IP65 enclosure, contactless
- ☐ Green Mushroom Mullion Plate

Comments
