

Mechanical timer TD

Adjustable hold-open time for sliding door closers



Video



Website

CHARACTERISTICS

- Used on sliding doors that should remain open for a while before closing again
- Strictly mechanical, without electricity
- Installed with the door in open position
- Adjustable delay time
- Opening time dependent on the closing force of the closing device used


FUNCTION

- Based on the same hydraulic operating principle of door dampers, but with the opposite effect
- A valve in the cylinder limits the flow rate of the oil. This determines the time after which the roller lever is completely folded down again and thus no longer held back by the hook and the door can close again



DIMENSIONS

All dimensions in mm

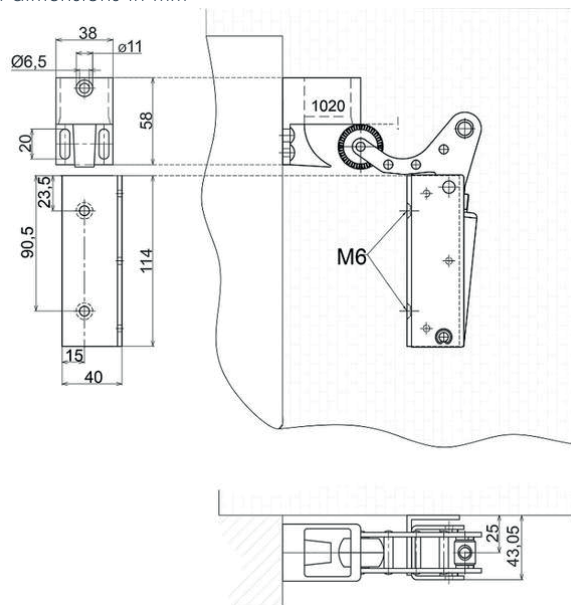

INSTALLATION



Installation
instructions

ORDER INFORMATION

Description	Part no.
Mechanical timer TD, adjustable, zinc-plated, with mounting bracket and hook 1020	500270

TECHNICAL DATA

Material	zinc-plated (casing), stainless steel (fixing bracket); satin-chrome aluminium (hook)
Delay time	Adjustable – duration depends on closing force of the closing device (see diagram) 1 – 175 s
Possible closing devices	Sliding door closer DICTA-MAT 50, spring rope pulley, counterweight
Components included	Mechanical timer, hook 1020 with large hole, mounting bracket, fixing screws for wooden doors

TIME DELAY SETTING RANGE

